




SWITCH MOUSE OFF  
INSTALL BATTERIES

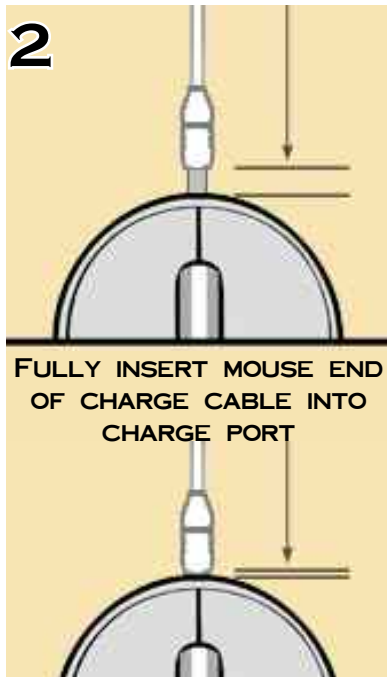


FULLY INSERT MOUSE END  
OF CHARGE CABLE INTO  
CHARGE PORT

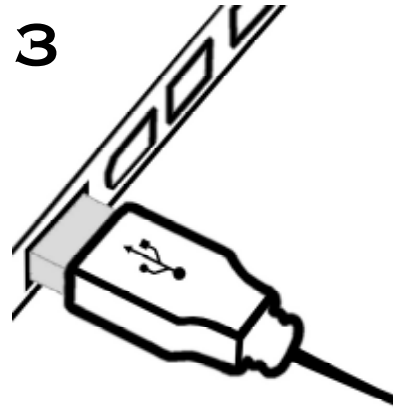


CONNECT USB END  
OF CHARGE CABLE TO  
COMPUTER

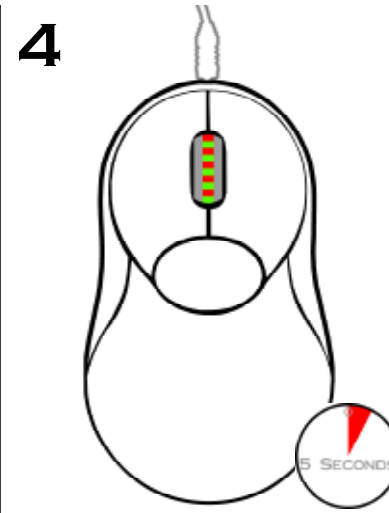


SCROLL WHEEL FLASHES  
RED & GREEN FOR 5  
SECONDS WHILE PREPARING  
TO CHARGE

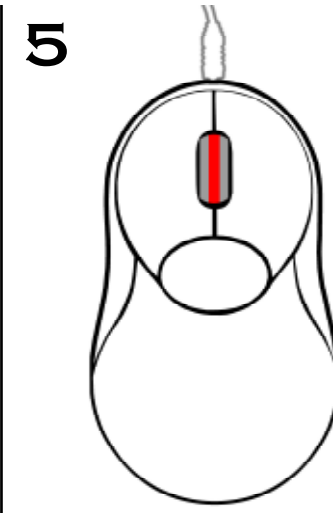


SCROLL WHEEL  
ILLUMINATES RED WHILE  
BATTERIES ARE CHARGING

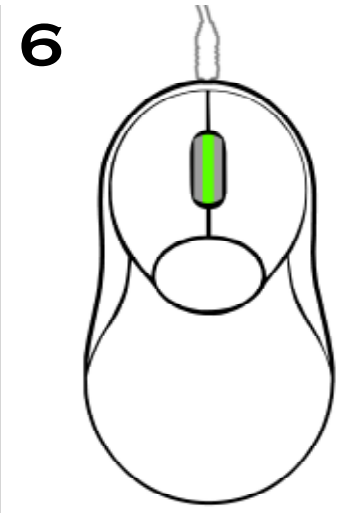



SCROLL WHEEL  
ILLUMINATES GREEN WHEN  
FULLY CHARGED  
CHARGE TIME = 2 HOURS

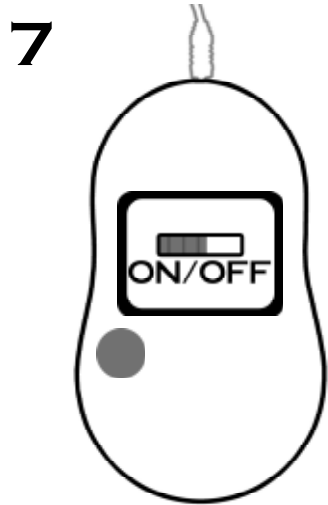


SWITCH MOUSE ON  
PRESS PAIRING BUTTON

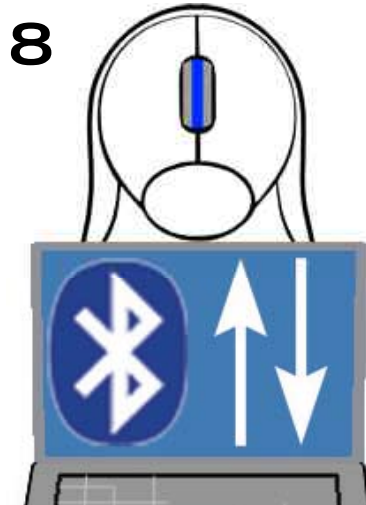



WHILE SCROLL WHEEL  
GLOWS BLUE  
PAIR TO COMPUTER

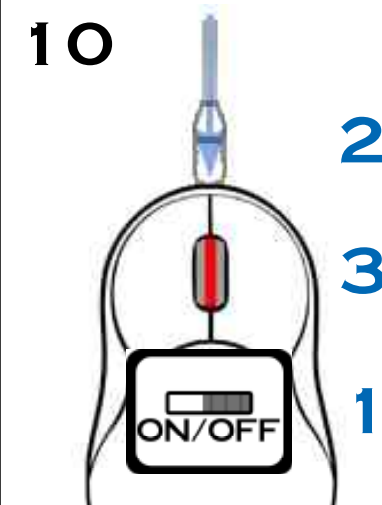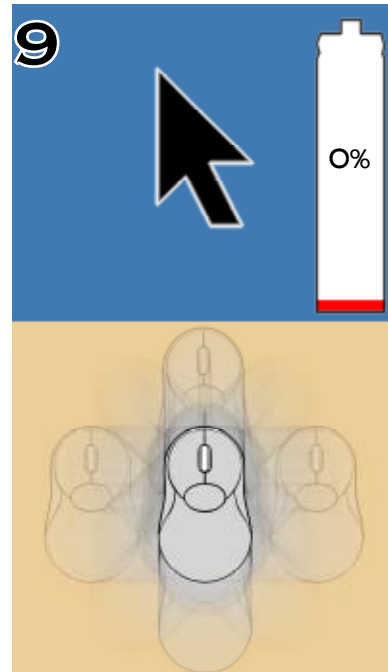

WHEN BATTERIES FAIL  
SWITCH OFF  
CONNECT CHARGE CABLE  
SCROLL WHEEL GLOWS RED

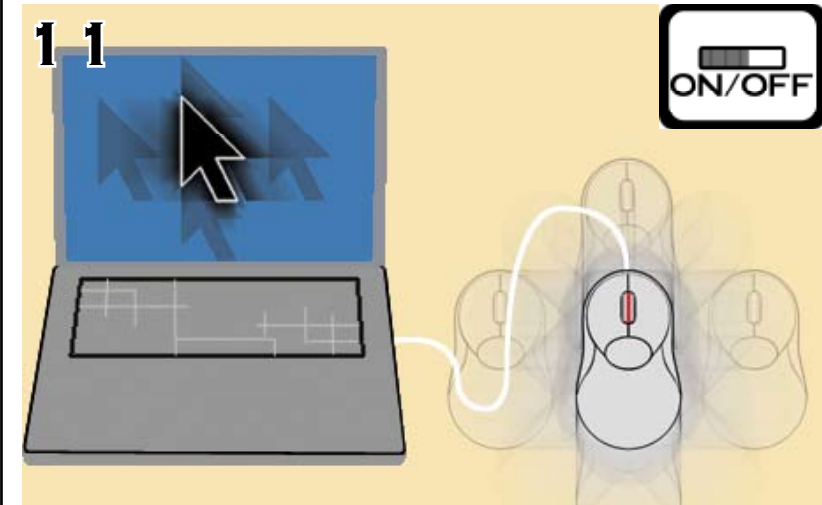

TO USE WHILE CHARGING  
SWITCH MOUSE ON ONCE SCROLL WHEEL IS SOLID RED  
DISCONNECT CABLE ONCE CHARGE IS COMPLETE (GREEN)

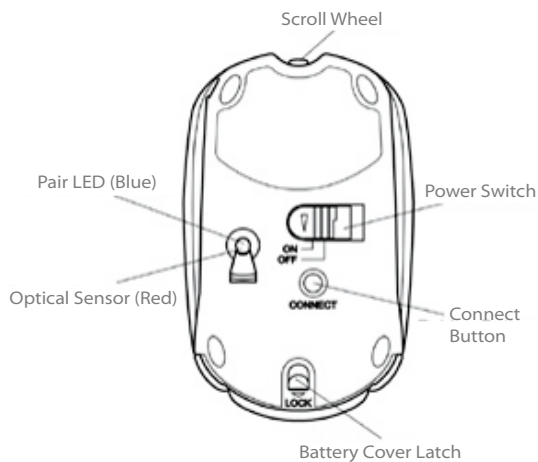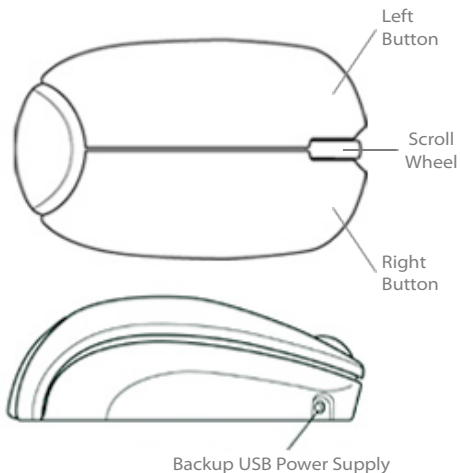

Use power On/Off switch to conserve energy when not in use


## Before Using

1. Install two AAA batteries into the battery slots of your BT510 Mouse. Alkaline or NiMH rechargeable recommended.
2. Slide the power switch to the on position and press the connect button on the underside of the mouse until the optical sensor flashes blue to indicate mouse is discoverable.
3. Pair your BT 510 Bluetooth Mouse with your computer.

## Pairing Process Mac

1. With Bluetooth active on your computer, launch the "Bluetooth Setup Assistant" using one of several options:


- BT menubar widget > Set up Bluetooth Device

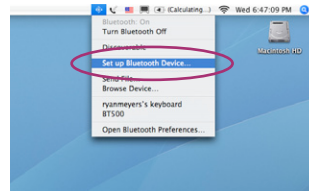


- System Preferences > Bluetooth > Devices Tab > Set up New Device.



- Menubar > Go > Utilities > Bluetooth Setup Assistant

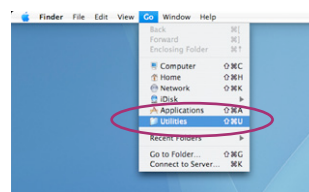

2. With "Bluetooth Setup Assistant" launched, click "Continue" to proceed to the next step.

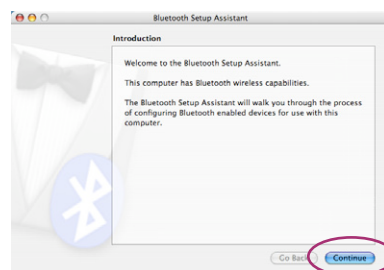

## How to Install Batteries



1. Press and push raised area to open battery cover.




2. Insert AAA batteries into slots.




3. Slide battery cover back into position and snap into place.

Power-saving sleep mode extends battery life – when the mouse is moved after being in sleep mode, the connection is restored in seconds. Battery life averages 8-14 days when powered on 24/7, and up to several weeks when used 4-6 hours per day – switched off when not in use. Alkaline or NiMH rechargeable recommended.


3. Choose "Mouse" Make sure mouse is discoverable (press connect button) and click "Continue" to proceed to the next step.

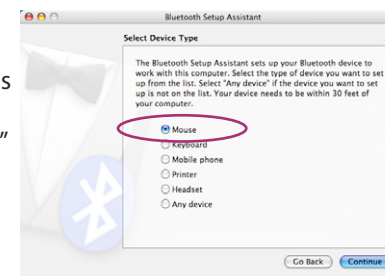


4. Once the BT510 is found and appears in the list, select it and click "Continue".

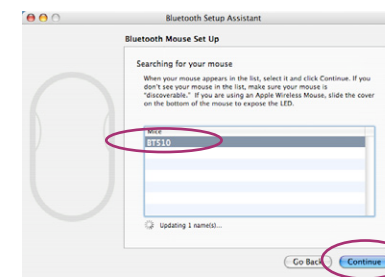

5. The pairing process will complete in 10-15 seconds. You may click "Quit" to exit the Setup Assistant.

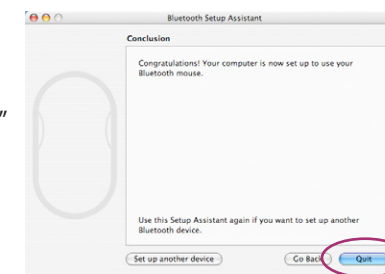

6. The BT510 will appear listed as a paired device under the device tab of the Bluetooth preferences pane.

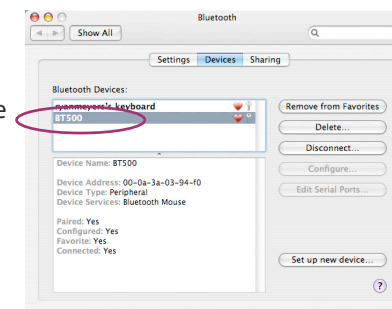

The BT510 will automatically reconnect after restarts or shut-downs.

**NOTE:** Use care NOT to press connect button once BT510 has been paired. If pressed, connection will be lost and pairing process will need to be repeated.

If using with the Apple Wireless Bluetooth Keyboard – switch on keyboard first – then mouse (after mouse is paired).

For troubleshooting and other helpful tips go to: [www.radtech.us/BT510tips](http://www.radtech.us/BT510tips)

Please follow regional rules for Bluetooth use.

### Important Note:

USB power cable allows use with dead batteries or without batteries installed.

If non-rechargeable batteries are installed, only use USB cable if batteries are depleted.

If rechargeable NiMH cells are installed, USB cable can be used anytime, and will trickle-charge cells.

© 2005 RadTech, LLC. RadTech and the RadTech logo are trademarks of RadTech, LLC. Bluetake, the Bluetake logo and BT510 are trademarks of Bluetake Technology Co., Ltd. The Bluetooth word mark and logos are owned by Bluetooth SIG, Inc. and any use of such marks by Bluetake Technology Co., Ltd. is under license. All other trademarks belong to their respective owners. The information in this document is subject to change without notice.